

<h1 style="text-align: center;">UTILITY PATENT APPLICATION TRANSMITTAL</h1> <p><i>(Only for new nonprovisional applications under 37 CFR 1.53(b))</i></p>	Attorney Docket No. 1614.05
	First Named Inventor or Application Identifier: Hironori MORITO et al.
	Express Mail Label No.

<b>APPLICATION ELEMENTS</b> See MPEP chapter 600 concerning utility patent application contents.	<b>ADDRESS TO: Assistant Commissioner for Patents</b> <b>Box Patent Application</b> <b>Washington, DC 20231</b>
<ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> Fee Transmittal Form</li> <li>2. <input checked="" type="checkbox"/> Specification, Claims &amp; Abstract ..... [ Total Pages: <u>27</u> ]</li> <li>3. <input checked="" type="checkbox"/> Drawing(s) (35 USC 113) ..... [ Total Sheets: <u>9</u> ]</li> <li>4. <input checked="" type="checkbox"/> Oath or Declaration ..... [ Total Pages: <u>4</u> ]           <ol style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> Newly executed (original or copy)</li> <li>b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)               <ol style="list-style-type: none"> <li>i. <input type="checkbox"/> <b>DELETION OF INVENTOR(S)</b> Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).</li> </ol> </li> </ol> </li> <li>5. <input type="checkbox"/> Incorporation by Reference (usable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</li> <li>6. <input type="checkbox"/> Microfiche Computer Program (Appendix)</li> <li>7. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> Computer Readable Copy</li> <li>b. <input type="checkbox"/> Paper Copy (identical to computer copy)</li> <li>c. <input type="checkbox"/> Statement verifying identity of above copies</li> </ol> </li> </ol>	
<b>ACCOMPANYING APPLICATION PARTS</b>	
<ol style="list-style-type: none"> <li>8. <input checked="" type="checkbox"/> Assignment Papers (cover sheet &amp; document(s))</li> <li>9. <input type="checkbox"/> 37 CFR 3.73(b) Statement (when there is an assignee) [ ] Power of Attorney</li> <li>10. <input type="checkbox"/> English Translation Document (if applicable)</li> <li>11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 [ ] Copies of IDS Citations</li> <li>12. <input type="checkbox"/> Preliminary Amendment</li> <li>13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)</li> <li>14. <input type="checkbox"/> Small Entity Statement(s) [ ] Statement filed in prior application, status still proper and desired.</li> <li>15. <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)</li> <li>16. <input type="checkbox"/> Other:</li> </ol>	
<b>17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:</b> <input type="checkbox"/> Continuation [ ] Divisional [ ] Continuation-in-part (CIP) of prior application No: <u>    /    </u>	
<b>18. CORRESPONDENCE ADDRESS</b>	
STAAS & HALSEY LLP Attn: H. J. Staas 700 Eleventh Street, N.W., Suite 500 Washington, DC 20001	
Telephone: (202) 434-1500 Facsimile: (202) 434-1501	

Jc644 U.S. PTO  
 03/29/00

SPECIFICATION

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN THAT WE, Hironori Morito, a citizen of Japan residing at Kawasaki-shi, Kanagawa, Japan, Kohki Yahisa, a citizen of Japan residing at Kawasaki-shi, Kanagawa, Japan, Junko Komine, a citizen of Japan residing at Kawasaki-shi, Kanagawa, Japan, Mika Terai, a citizen of Japan residing at Kawasaki-shi, Kanagawa, Japan, Hideki Kawamoto, a citizen of Japan residing at Kanazawa-shi, Ishikawa, Japan and Akira Higashino, a citizen of Japan residing at Kanazawa-shi, Ishikawa, Japan have invented certain new and useful improvements in

DATA CONVERTING APPARATUS, METHOD FOR CONVERTING DATA AND  
COMPUTER-READABLE RECORDING MEDIUM RECORDED WITH A PROGRAM  
FOR CAUSING A COMPUTER TO CONVERT DATA

of which the following is a specification : -

TITLE OF THE INVENTION

DATA CONVERTING APPARATUS, METHOD FOR  
CONVERTING DATA AND COMPUTER-READABLE RECORDING  
MEDIUM RECORDED WITH A PROGRAM FOR CAUSING A  
5 COMPUTER TO CONVERT DATA

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention generally relates  
10 to data converting apparatuses, methods for  
converting data and computer-readable recording  
media recorded with a program for causing a computer  
to convert data, and more particularly to a data  
converting apparatus, a method for converting data  
15 and a computer-readable recording medium recorded  
with a program for causing a computer that can  
superimpose input data on a predetermined form so as  
to print superimposed data without a special  
application for superimposing data.

20 Recently, in a printing apparatus  
connecting to a computer, especially, in a case in  
which an overlay printing that superimposes data is  
required, it is desired that a user can realize the  
overlay printing by the same operation as a usual  
25 printing operation from the computer connecting to  
the printing apparatus, instead of using an  
overlying printing application that limits usage.

2. Description of the Related Art

In a conventional overlay printing system,  
30 generally, the following methods are used.

In a case in which an Operating System  
(OS) has a function for superimposing data, a  
special computer application is used to generate an  
overlay data format (for example, a storage address)  
35 in accordance with the function of the OS.

In another case in which the OS does not  
have the function for superimposing data, another

special application having a function (for example, a function superimposing a predetermined overlay form and a set of data for a page) corresponding to the function mentioned above of the OS is used or a  
5 user creates a document by merging a fixed overlay form with a set of data on the computer.

However, in the conventional overlay print system, there are some disadvantages.

In the case in which the OS has a  
10 function for the overlay print, the system requires a special application to make the most of the OS. In this case, there is a disadvantage limiting usage such that it always requires a user to use the special application to make the overlay form and  
15 information such as an input data or text data. Also, a variation for the overlay form and information to be superimposed is limited. Accordingly, it requires the user to learn how to use the special application and an installation  
20 expense is also required.

Moreover, in the case in which the OS does not include the function for the overlay print, for example, Microsoft® Windows® system achieves the overlay print as described below.

25 The overlay print on the Microsoft® Windows® system limits one document, that is, one file to print out. Thus, it is impossible to superimpose data of two different files and print out. Accordingly, it requires a special application  
30 that superimposes two different files per page so as to make one file. As a result, the special application creates a large amount of data while two different files are superimposed page by page. The created large amount of data reduces a print  
35 performance. In addition, when a remote user attempts the overlay print via a network, the large amount of data occupies the communication path and

causes a decrease of throughput performance of a LAN or the like. Hence, these disadvantages effect operations of other systems or applications.

5    SUMMARY OF THE INVENTION

          It is a general object of the present invention to provide a data converting apparatus, a method for converting data and a computer-readable recording medium that can superimpose input data on  
10 a predetermined form so as to print superimposed data, instead of using a special application for superimposing data, in which the above-mentioned problems are eliminated.

          A more specific object of the present  
15 invention is to provide a data converting apparatus, a method for converting data and a computer-readable recording medium such that a current OS can be utilized and a user can print superimposed data without using a special application.

          The above objects of the present  
20 invention are achieved by a data converting apparatus including: a data converting part converting a set of input data into a set of image data that can be processed by an image forming  
25 apparatus forming an image on a medium in accordance with the set of image data; a superimposing part superimposing at least two sets of image data converted from at least two different sets of input data so as to generate a single set of superimposed  
30 image data; and a data sending part sending the single set of superimposed image data to the image forming apparatus, wherein the image forming apparatus forms a single image on the medium based on the single set of superimposed image data.

35           According to the present invention, it is possible for a user to print a set of superimposed data such that two different data files are

superimposed to be one data file, without any special application. Also, no special operation is not required for the user to print the superimposed data.

5                   The above objects of the present invention are achieved by a method for converting data including the steps of: (a) converting a set of input data into a set of image data that can be processed at an image forming apparatus forming an  
10 image on a medium in accordance with the set of image data; and (b) superimposing at least two sets of image data converted from at least two different sets of input data so as to generate a single set of superimposed image data, wherein the image forming  
15 apparatus forms a single image on the medium based on the single set of superimposed image data.

                  According to the present invention, the method for converting data can be provided so that a user can print a set of superimposed data such that  
20 two different data files are superimposed into one data file, without any special application. Also, no special operation is required for the user to print the set of superimposed data.

                  The above objects of the present invention are achieved by a computer-readable recording medium recorded with a program for causing a computer to convert data, said program including the steps of: (a) converting a set of input data into a set of image data that can be processed at an  
30 image forming apparatus forming an image on a medium in accordance with the set of image data; and (b) superimposing at least two sets of image data converted from at least two different sets of input data so as to generate a single set of superimposed  
35 image data, wherein the image forming apparatus forms a single image on the medium based on the single set of superimposed image data.

According to the present invention, the computer-readable recording medium recorded with a program for causing a computer to convert data can be provided so that a user can print a set of  
5 superimposed data such that two different data files are superimposed to be one data file, without any special application. Also, no special operation is required for the user to print the set of superimposed data.

10

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects, features and advantages of the present invention will become more apparent from the following detailed description when read in  
15 conjunction with the accompanying drawings, in which:

FIG.1 is a diagram showing a system construction according to an embodiment of the present invention;

20

FIG.2 is a diagram showing a hardware construction according to the embodiment of the present invention;

FIG.3 is a diagram showing a data structure of an overlay information according to the  
25 embodiment of the present information;

FIG.4 is a diagram showing a data structure of an authorization information according to the embodiment of the present invention;

FIG.5 is a flowchart for broadly  
30 explaining an overlay control process according to the embodiment of the present invention;

FIG.6 is a flowchart for explaining an overlay registration according to the embodiment of the present invention;

35

FIG.7 is a flowchart for explaining an overlay print according to the embodiment of the present invention;

FIG.8 is a flowchart for explaining an overlay management according to the embodiment of the present invention; and

FIG.9 is a diagram showing an example of an output superimposed a text data over an overlay form according to the embodiment of the present invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG.1 is a diagram showing a system construction according to an embodiment of the present invention.

In FIG.1, a data converting apparatus 100 includes a printer driver 110, an OS (Operating System) 1, a printer system 2 of the OS, an application processing part 3, a data format converting part 4 for the printer driver 110, a print control part 5 for the printer driver, an input processing part 6, an output processing part 7, a recording medium 8 and a working storage area 9. The printer driver 110, the data format converting part 4 and print control part 5 execute an overlay control program that is described later.

The OS 1 is an operating system on a personal computer (hereinafter called PC).

The printer system 2 is a standard printer system provided by the OS 1.

The input processing 6 controls input information from a keyboard, a mouse or other input device operated by a user.

The output processing 7 controls output information in which the input information is super imposed over an overlay form in order to output to a printer or other output device.

Information needed by the overlay control program, which is described later, is written on or read from the working storage area 9 of the

recording medium 8.

A hardware configuration realizing the data converting apparatus 100 will now be described.

FIG.2 is a diagram showing a hardware  
5 configuration according to the embodiment of the present invention.

In FIG.2, the data converting apparatus 100 includes a CPU (Central Processing Unit) 11 to execute the overlay control program according to the  
10 present invention, RAM (Random Access Memory) 12 to temporarily store the overlay program and data, a HDD (Hard Disk Drive) 20 where the program is loaded and stored and needed tables are stored, a printer 14 to output superimposed information, a MODEM 15  
15 and a LAN (Local Area Network) 16 through which other terminals access the data converting apparatus 100, a mouse 17 and a keyboard 18 to operate the apparatus 100 or to input necessary information, and a CRT (Cathode Ray Tube) 19 or similar video display  
20 to display necessary information for a user as an interface between the user and the apparatus 100. It should be noted that ROM (Read Only Memory) 13, a FD (Floppy Drive) 21 or similar removable magnetic storage or a CD-ROM (Compact Disk-Rom) 22 or similar  
25 removable optical storage may be provided to store the program and data in the apparatus 100, but any computer-readable medium that stores the program and data can be provided.

Information stored in the working storage  
30 area 9 in FIG.1 will now be described with reference to FIG.3 and FIG.4

FIG.3 is a diagram showing a data structure of overlay information according to the embodiment of the present invention.

35 In FIG.3, an overlay file 30 corresponds to a file storing information concerning a single overlay form. The overlay file 30 includes three

sections, an overlay registration information section 31, an overlay management information section 32 and an overlay data section 33. A plurality of overlay file 30 is required when a  
5 plurality of overlay form is required.

The overlay registration information section 31 further includes a printer name 311, a resolution 312, a sheet size 313, a sheet orientation 314 and other information.

10 The overlay management information section 32 further includes editor information 321, authorization information 322, attribute information 323, a management name 324, specific information 325 and other information.

15 FIG.4 is a diagram showing a data structure of the authorization information 322 according to the embodiment of the present invention.

In FIG.4, the authorization information 322 includes a user list 43 and a management  
20 information table 40.

In the user list 43, any user 431 is for any user other than a registration manager and special users 432, 433 and other special users. The special users 432, 433 and others indicate user  
25 information such as a user ID, a user name or the like when those users are authorized as special users differently from the user 431. Needed special users are listed after the user 431.

The management information table 40 uses  
30 four bits of the authorization information 322.

Each user record in the user list 43 includes management information. For example, the users 431, 432 and 433 correspond to management information 401, 402 and 403, respectively.

35 Also, each management information table 40 includes a use authorization 41 and a management authorization 42.

In the use authorization 41, a bit 3 shows a use authorization indicating whether a user is permitted to use an overlay form and a bit 2 shows an change layout authorization indicating whether the user is permitted to change a layout of the overlay form. It is assumed that in any bit, a bit value '1' indicates that a user is permitted and a bit value '0' indicates that the user is not permitted.

10 In the management authorization 42, a bit 1 shows a modification authorization indicating whether the user is permitted to modify information of the overlay form and a bit 0 shows a delete authorization indicating whether the user is permitted to delete the overlay form. It is assumed that in any bit, a bit value '1' indicates that a user is permitted and a bit value '0' indicates that the user is not permitted.

20 It is also assumed that the management information 401 for any user 431 is defined as a default such that any user is allowed to use and change a layout of the overlay form but not allowed to modify and delete the overlay form. In this case, the bit 3 is set to a value '1', the bit 2 is set to a value '1', the bit 1 is set to a value '0' and the bit 0 is set to a value '0'. If there is no special user in the user list, the management information 401 as a default is always used.

30 When management information for a special user is defined to authorize differently from the default, for example, the special user 432 is allowed to use but not change, modify or delete the overlay form. In this case, the bit 3 is set to a value '1', the bit 2 is set to a value '0', the bit 1 is set to a value '0' and the bit 0 is set to a value '0'.

The authorization information 322 and the

management information table 40 are updated when an overlay form is registered or is managed.

An overlay control process executed by the overlay control program will now be described.

5 FIG.5 is a flowchart for broadly explaining the overlay control process according to the embodiment of the present invention.

In FIG.5, a user selects "print" from a menu provided in an application to create a new  
10 overlay form in step S1.

In step S11, a print window is displayed when "print" is selected from the menu. When the user desires a process concerning an overlay printing for superimposing input data or a document  
15 over an overlay form, the user selects "overlay print" from the print window and then selects either "overlay registration", "overlay print start" or "overlay management". The printer system 2 of the OS 1 in FIG.1 indicates the process selected by the  
20 user to the print control part 5.

In step S11, the user may register the new overlay form by selecting a printer for overlay printing.

In step S2, the print control part 5  
25 checks whether the user selects the "overlay print" or not. When the "overlay print" is not selected, the process goes to step S7 for a normal printing. When the "overlay print" is selected, the overlay control process goes to step S3.

30 In step S3, the print control part 5 checks which sub-process is selected. The overlay control process includes three sub-processes, mainly, an overlay registration, an overlay print start and an overlay management. In the case in which the  
35 overlay registration is selected, the overlay control process goes to step S4 to register the new overlay form. In the case in which the overlay

print start is selected, the overlay control process goes to step S5. In the case in which the overlay management is selected, the overlay control process goes to step S6.

5                   When the overlay registration is selected, in step S4, in order to create a new overlay file 30 in FIG.3, the user sets information for the overlay registration information section 31 and the overlay management information section 32 shown in FIG.3.  
10   The information set by the user and the new overlay form are stored in the new overlay file 30 in the working storage area 9 of the recording medium 8 in FIG.1. After overlay registration is completed, the overlay control process is terminated.

15                   When the user selects the overlay print start, in step S5, the user selects one of the overlay forms registered before, that is, one overlay file 30 of the overlay files 30 stored in the working storage area 9 is retrieved.  
20   Subsequently, information such as input data or text data is superimposed over the overlay form indicated by the overlay data 33 of the retrieved overlay file 30 as shown in FIG.3. After the overlay print is completed, the overlay control process is terminated.

25                   When the user selects the overlay management, in step S6, the selected overlay file 30 is retrieved from the working storage area 9 in order to modify or delete it. After the overlay management is completed, the overlay control process  
30   is terminated.

                  When in step S2 the user selects the normal print process, the overlay print goes to step S7. The printer system 2 as shown in FIG.1 executes the data format converting part 4 to convert the  
35   data format. After the data conversion, the printer system 2 executes the print control 5 to print out from the printer 14 (shown in FIG.2) based on the

converted data format.

The overlay registration as a sub-process in the overlay control process will now be described.

FIG.6 is a flowchart for explaining the  
5 overlay registration according to the embodiment of the present invention.

In step S42, the print control part 5 in FIG.1 stores a new overlay file 30 including a new overlay form that a user creates and information  
10 thereof in the working storage area 9.

In step S43, the print control part 5 displays a window where the user sets information for the overlay registration information section 31, including the printer name 311, the resolution 312,  
15 the sheet size 313, the sheet orientation 314 and any additional information. Then, the print control part 5 stores the above information in the working storage area 9.

After step S43, in step S44, the print  
20 control part 5 displays another window where the user sets information for the overlay management information section 32, including the editor information 321, the authorization information 322, the attribute information 323, the management name  
25 324, the specific information 325 and any additional information. Then, the print control part 5 stores the above information in the working storage area 9. The user may set information including the user list 43 and management information table 40 shown in  
30 FIG.4 for the authorization information 322.

In step S45, the print control part 5 notifies the printer system 2 that all information is set, that is, the registration for the new overlay form is complete.

35 In step S46, the printer system 2 executes the data converting part 4 to convert the data format of the overlay form into another data

format which a printer can process. After the conversion, the data converting part 4 notifies the printer system 2 that the conversion is complete.

The printer system 2 signals the print control part 5 to print out in step S47.

The print control part 5 checks whether the user selects the overlay registration in step S48. When the overlay registration is selected, the sub-process goes to step S49. When the overlay registration is not selected, the sub-process goes to step S481.

In step S481, the print control part 5 signals the output processing 7 for the normal print.

In step S49, when the print control part 5 judges that the overlay registration is selected in step S48, the overlay form converted by the data converting part 4 is stored in the overlay data 33 of the overlay file 30. The print control part 5 notifies the printer system 2 that the overlay registration is complete.

The overlay print sub-process will now be described.

FIG.7 is a flowchart for explaining the overlay print according to the embodiment of the present invention.

When the user selects the overlay print, an overlay form list window where the user selects one of overlay forms is displayed in step S51.

When the user selects one overlay form from the overlay form list window, the use authorization of the selected overlay form is checked in step S52. When the bit 3 of the use authorization 41 shown in FIG.4 indicates a value '1', that is, the user is permitted to use the selected overlay form, the sub-process goes to step S53. When the bit 3 indicates a value '0', the user is not permitted, the sub-process is terminated.

In step S53, the printer system 2 signals the data converting part 4 to convert data to be printed by the printer 14.

5 In step S54, the data converting part 4 checks whether the overlay print is selected. When the overlay print is selected, the sub-process goes to step S55. When the overlay print is not selected, the sub-process goes to step S517.

10 In step S55, the data converting part 4 converts a data format into another data format to be printed and sends the printer system 2 the converted data format with the overlay form selected by the user.

15 The printer system 2 indicates the print control part 5 to print from the printer 14 in step S56.

20 The print control part 5 checks whether overlay print is indicated by information of the received data to be printed in step S57. When the information does not indicate the overlay print, the sub-process goes to step S517 for the normal print. When the additional information indicates the overlay print, the sub-process goes to step S58.

25 When the overlay print is indicated, the overlay data 33 of the selected overlay file 30 stored in the working storage area 9 is retrieved in step S58.

30 The overlay control part 5 checks whether it is permitted to change a layout of the selected overlay form on a sheet in step S59. When the bit 2 for the change layout authorization in the management table 40 of the overlay file 30 indicates a value '1', that is, when the user is permitted to change the layout, the sub-process goes to step S510.  
35 When the bit 2 indicates a value '0', that is, when the user is not permitted to change the layout, the sub-process goes to step S515.

When it is judged in step S59 that the user is permitted to change the layout, the print preview is displayed in step S510, which allows the user to change the layout.

5           The user selects to save, replace or cancel the overlay form whose layout is changed to a different overlay form, in step S511. When the user selects to save the changed overlay form as a different overlay form, the sub-process goes to step  
10 S512 to create another overlay form. When the user selects to replace the changed overlay form, the sub-process goes to step S513. When the user selects to cancel to store the changed overlay form, the sub-process goes to step S514 to start to print.

15           In step S512, in order to save as a different overlay form, another overlay file 30 for the changed overlay form is created and stored in the working storage area 9.

20           In step S513, in order to replace with the changed overlay form, the overlay data 33 of the overlay file 30 is replaced with data of the changed overlay form and stored in the working storage area 9.

25           In step S514, the print control part 5 controls to superimpose data on the overlay form, that is, the overlay data 33 of the overlay file 30.

          In step S515, the print control part 5 controls the output processing part 7 in FIG.1 to print out superimposed data.

30           In step S516, when it is judged in step S59 that the user is not permitted to change the layout of the overlay form on a sheet, the print preview which is protected not to change any data of the layout is displayed.

35           In step S517, when it is judged in step S57 that the overlay print is not indicated, the print control part 5 indicates the output processing

part 7 to process the normal print.

The overlay management process will now be described.

FIG.8 is a flowchart for explaining the  
5 overlay management according to the embodiment of  
the present invention.

In FIG.8, the overlay management window is displayed in step S61.

In step S62, the user selects one of the  
10 overlay forms registered before.

In step S63, the user selects to modify or delete the overlay form selected in step S62.

It is ascertained whether the user selects to modify the overlay form in step S64.  
15 When the user selects to modify, the sub-process goes to step S65 to check whether the user is permitted to modify. When the user selects to delete, the sub-process goes to step S67 to check whether the user is permitted to delete.

20 In step S65, it is ascertained whether the bit 1 indicating the modification authorization in the management table 42 indicate a value '1', that is, whether the user is permitted to modify the overlay form. When the bit 1 indicates a value '1',  
25 that is, when the user is permitted to modify the overlay form, the sub-process goes to step S66. When the bit 1 indicates a value '0', that is, when the user is not permitted to modify, the sub-process goes to step S651.

30 When it is judged in step S65 that the user is not permitted to modify the overlay form, information of the overlay file 30 is protected from modification in step S651.

When it is judged in step S65 that the  
35 user is permitted to modify, the user is allowed to modify information of the overlay file 30 in step S66.

In step S661, the user selects to save the changed management information as a different overlay form , replace with the management information changed by the user, or cancel . When  
5 the user selects to save as a different overlay form, the sub-process goes to step S662 to create another overlay file 30. When the user selects to replace, the sub-process goes to step S663. When the user selects to cancel, the sub-process is terminated.

10 When the user selects to save as a different overlay form, the current working overlay file 30 is copied and the copied overlay file 30 where information has been modified is saved as a different overlay file 30 in the working storage  
15 area 9 in step S662.

When the user selects to replace the overlay form, the overlay data 33 of the current working overlay file 30 is modified and saved as the same overlay file 30 in the working storage area 9.

20 When the user desires to delete the overlay form selected in step S64, it is ascertained whether the bit 0 of the management authorization 42 in FIG.4 indicates a value '1' in step S67. When the bit 0 indicates a value '1', that is, when the  
25 user is permitted to delete the selected overlay form the sub-process goes to step S68. When the bit 0 indicates a value '0', that is, when the user is not permitted to delete the selected overlay form, the sub-process goes to step S671.

30 When it is judged in step S67 that the user is not permitted to delete, information concerning the selected overlay file 30 is protected from deletion in step S671. The sub-process is terminated.

35 When it is judged in step S67 that the user is permitted to delete, the selected overlay file 30 is deleted in step S68. The sub-process is

terminated.

FIG.9 is a diagram showing an example of an output of data superimposed text data over an overlay form according to the embodiment of the present invention.

By processing the overlay registration and the overlay print, for example, when the user makes an address book, a new overlay file 30 which stores information concerning a form 9a for the address book as shown in FIG.9 is created and stored in the working storage area 9 of FIG.5 in step S4 of FIG.1 so as to complete the overlay registration. The user may make address information 9b including name, zip code, address and other information as text data or a document by using an application and then the user may attempt the overlay print to superimpose the address information 9b over the form 9a. After the overlay print, such a superimposed output 9c may be printed out from the printer 14.

The printer driver 110 in FIG.1 includes the overlay control process mentioned above. Therefore, any special application for the overlay print is not required. In addition, a printer is not required to have a storage area to store overlay forms. Furthermore, as mentioned above, any printer system having special functions other than the printer system 2 which is a part of the OS 1 is not required to operate the overlay registration, the overlay management, the overlay print and the normal print.

Moreover, by the authorization information 322, it is possible to manage user accesses via a network so that the data converting apparatus according to the present invention can be connected to the network via the modem 15 and the LAN 16 and remote users can be allowed to use the overlay print.

Therefore, it is possible for user to  
print superimposed data such that two different data  
files are superimposed to be one data file, without  
any special application. Also, no special operation  
5 is required for the user to print the superimposed  
data.

The present invention is not limited to  
the specifically disclosed embodiments, variations  
and modifications, and other variations and  
10 modifications may be made without departing from the  
scope of the present invention.

The present application is based on  
Japanese Priority Application No. 11-180229 filed  
June 25, 1999, the entire contents of which are  
15 hereby incorporated by reference.

WHAT IS CLAIMED IS:

- 5
1. A data converting apparatus  
comprising:
- 10 a data converting part converting a set of input data into a set of image data that can be processed by an image forming apparatus forming an image on a medium in accordance with the set of image data; and
- 15 a superimposing part superimposing at least two sets of image data converted from at least two different sets of input data so as to generate a single set of superimposed image data,
- wherein the image forming apparatus forms an image on the medium based on the single set of superimposed image data.
- 20
2. The data converting apparatus as
- 25 claimed in claim 1, further comprising a data sending part sending the single set of superimposed image data to the image forming apparatus.
- 30
3. The data converting apparatus as claimed in claim 1, further comprising a form
- 35 storing part selectively storing the set of image data converted from the set of input data as a predetermined form that is superimposed.

4. The data converting apparatus as  
5 claimed in claim 3, wherein said form storing part  
comprises a registration part registering the set of  
image data as a predetermined form that is  
superimposed.

10

5. The data converting apparatus as  
claimed in claim 3, further comprising a form  
15 selecting part selecting one of at least one  
predetermined form stored by the form storing part.

20

6. The data converting apparatus as  
claimed in claim 3, further comprising a form  
changing part changing the predetermined form stored  
by the form storing part.

25

7. The data converting apparatus as  
30 claimed in claim 6, further comprising a store  
control part selectively storing the predetermined  
form changed by the form changing part.

35

8. The data converting apparatus as

claimed in claim 7, wherein said form changing part  
changes layout information of the predetermined form  
on the medium, which information said form storing  
part stores by associating with the predetermined  
5 form.

10 9. The data converting apparatus as  
claimed in claim 1, further comprising a previewing  
part previewing said single set of superimposed  
image data generated by said superimposing part.

15

10. The data converting apparatus as  
claimed in claim 3, further comprising a limiting  
20 part limiting use of the predetermined form in  
accordance with limitation information that said  
form storing part stores by associating with the  
predetermined form.

25

11. A method for converting data  
comprising the steps of:

30 (a) converting a set of input data into a  
set of image data that can be processed by an image  
forming apparatus forming an image on a medium in  
accordance with the set of image data; and

(b) superimposing at least two sets of  
35 image data converted from at least two different  
sets of input data so as to generate a single set of  
superimposed image data,

wherein the image forming apparatus forms an image on the medium based on the single set of superimposed image data.

5

12. The method for converting data as claimed in claim 11, further comprising the steps of  
10 sending the single set of superimposed image data to the image forming apparatus.

15

13. The method as claimed in claim 11, wherein said step (b) superimposed at least one set of image data over another set of image data that is converted from the set of input data and stored as a  
20 predetermined form.

25

14. The method as claimed in claim 13, wherein said step (b) selects a desired form from at least one predetermined form and superimposes at least one set of image data over the desired form.

30

15. The method as claimed in claim 13, wherein said step (b) enables to change the  
35 predetermined form.

16. The method as claimed in claim 13,  
wherein said step (b) enables to change layout  
5 information that indicates a position where the  
predetermined form is formed on a medium and is  
stored by associating with the predetermined form.

10

17. The method as claimed in claim 11,  
further comprising the step of previewing said  
single set of superimposed image data generated by  
15 said step (b).

20

18. The method as claimed in claim 11,  
further comprising the step of limiting use of the  
predetermined form in accordance with limitation  
information that is stored by associating with the  
predetermined form.

25

19. A computer-readable recording medium  
30 recorded with a program for causing a computer to  
convert data, said program comprising the steps of:

(a) converting a set of input data into a  
set of image data that can be processed by an image  
forming apparatus forming an image on a medium in  
35 accordance with the set of image data; and

(b) superimposing at least two sets of  
image data converted from at least two different

sets of input data so as to generate a single set of superimposed image data,

wherein the image forming apparatus forms an image on the medium based on the single set of superimposed image data.

10                   20. The computer-readable recording medium recorded as claimed in claim 19, further comprising the steps of sending the single set of superimposed image data to the image forming apparatus.

15

20                   21. The computer-readable recording medium as claimed in claim 19, wherein said step (b) superimposed at least one set of image data over another set of image data that is converted from the set of input data and stored as a predetermined form.

25

30                   22. The computer-readable recording medium as claimed in claim 19, wherein said step (b) selects a desired form from at least one predetermined form and superimposes at least one set of image data over the desired form.

35

23. The method as claimed in claim 21,

wherein said step (b) enables to change the predetermined form.

5

24. The method as claimed in claim 21,  
wherein said step (b) enables to change layout  
information that indicates a position where the  
10 predetermined form is formed on a medium and is  
stored by associating with the predetermined form.

15

25. The method as claimed in claim 19,  
further comprising the step of previewing said  
single set of superimposed image data generated by  
said step (b).

20

26. The method as claimed in claim 19,  
25 further comprising the step of limiting use of the  
predetermined form in accordance with limitation  
information that is stored by associating with the  
predetermined form.

ABSTRACT OF THE DISCLOSURE

In a data converting apparatus, a data  
converting part converts a set of input data into a  
set of image data that can be processed by an image  
5 forming apparatus forming an image on a medium in  
accordance with the set of image data and a  
superimposing part superimposes at least two sets of  
image data converted from at least two different  
sets of input data so as to generate a single set of  
10 superimposed image data. By sending the single set  
of superimposed image data to the image forming  
apparatus, the image forming apparatus can form an  
image on the medium based on the single set of  
superimposed image data.

F I G. 1

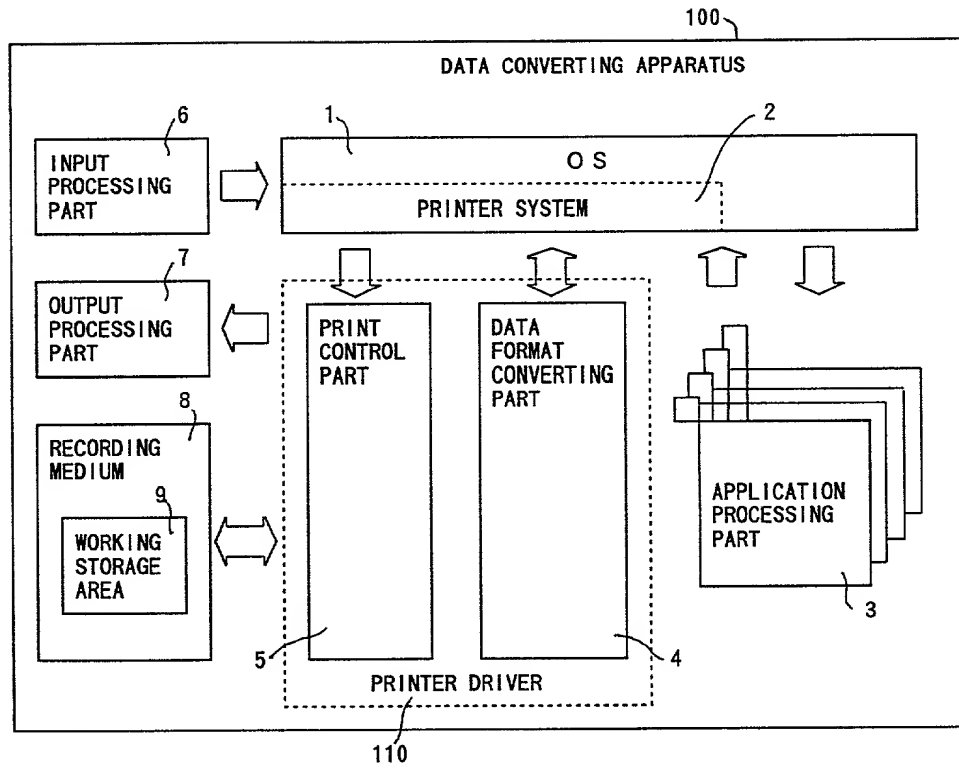


FIG. 2


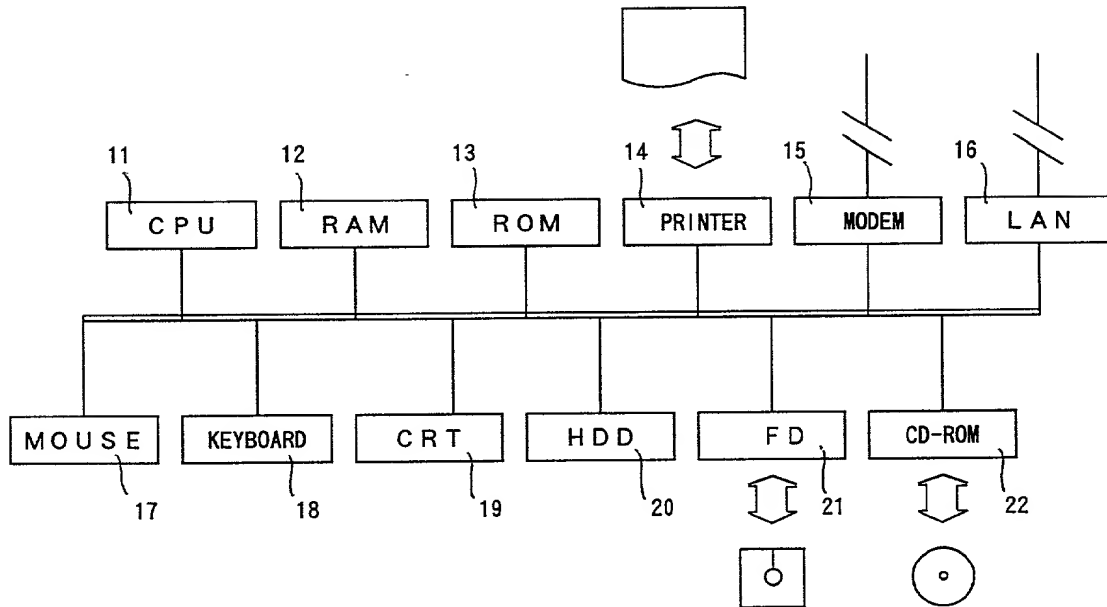


FIG. 3

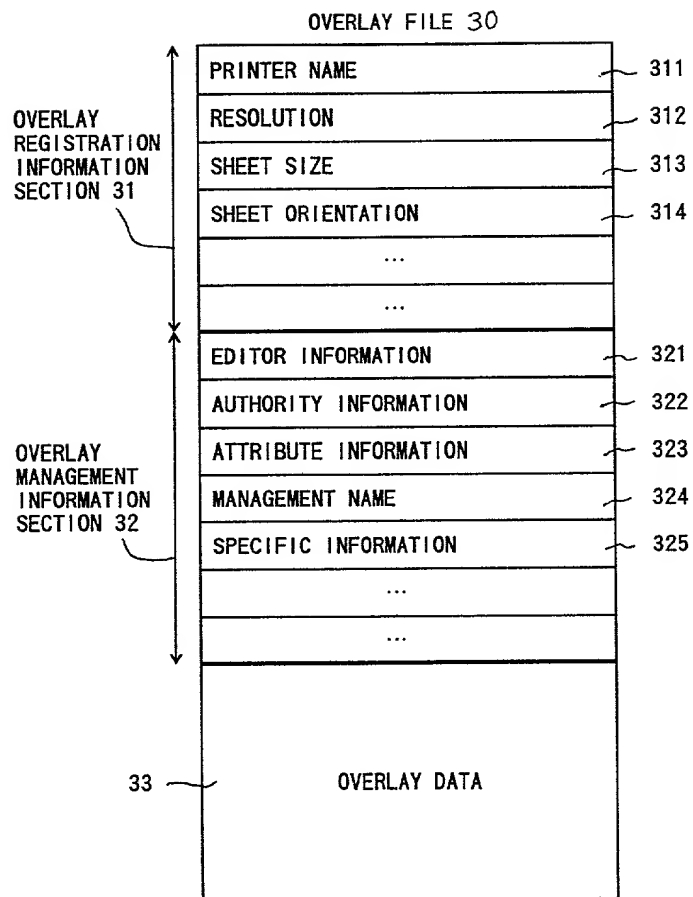

# FIG. 4

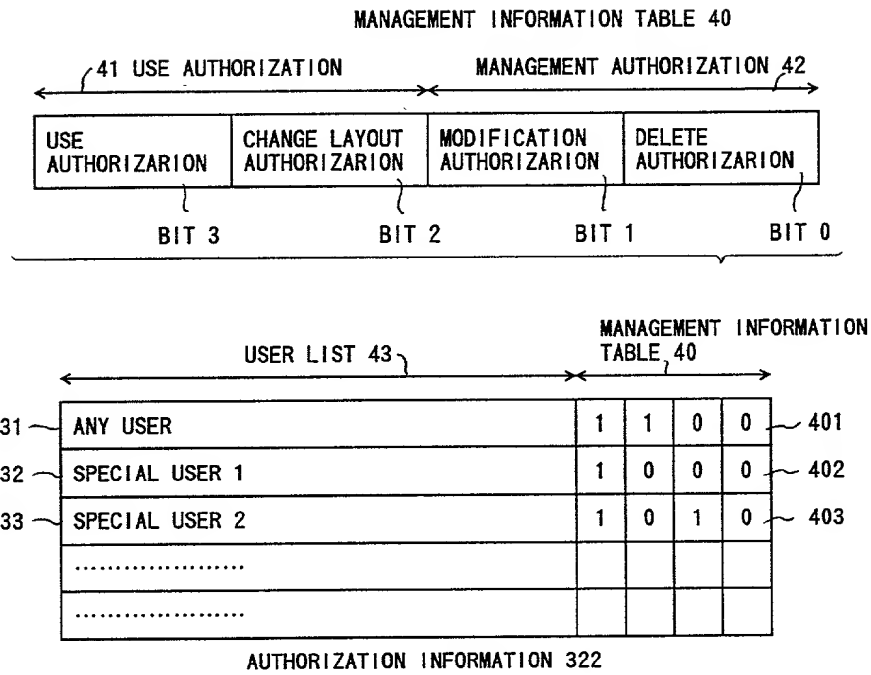


FIG. 5

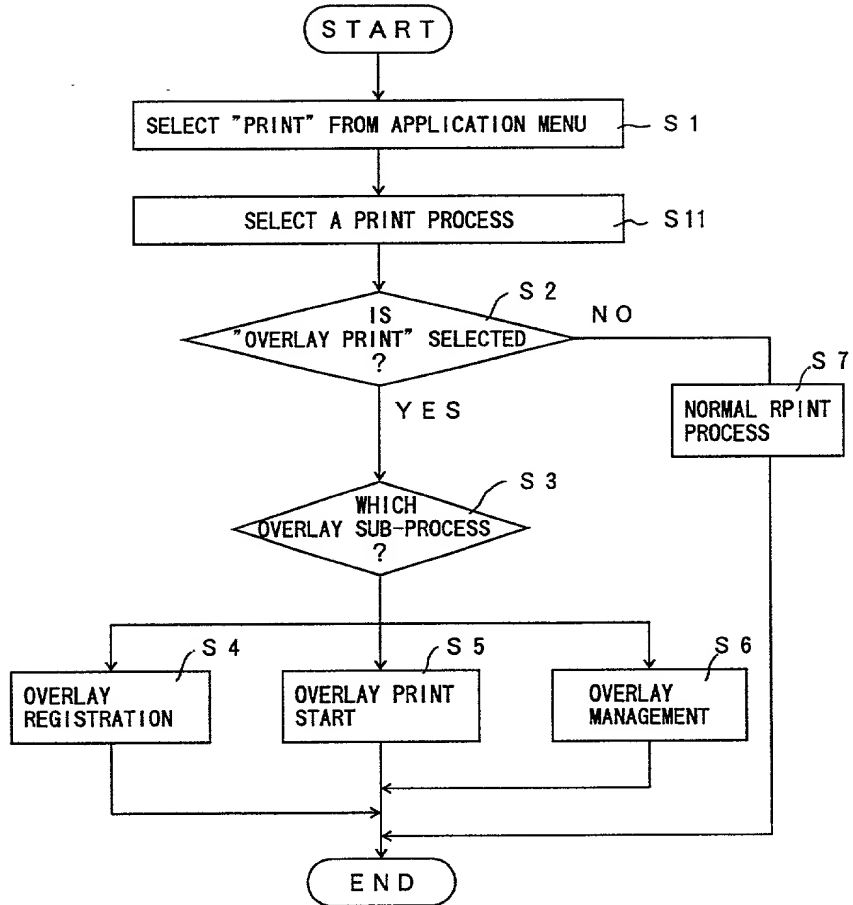


FIG. 6



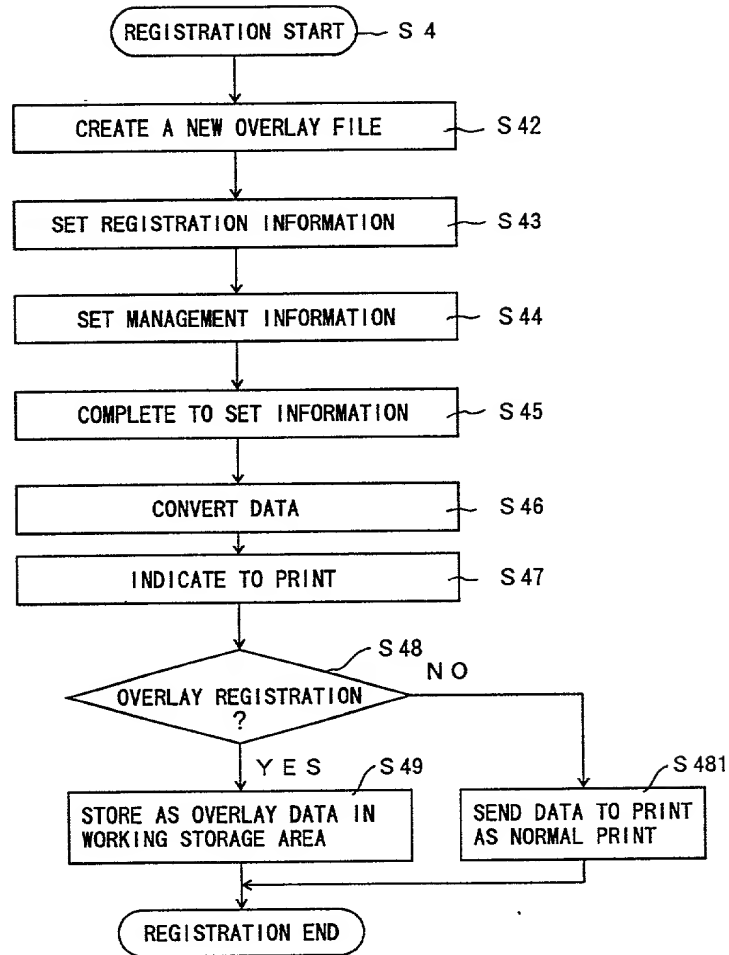


FIG. 7

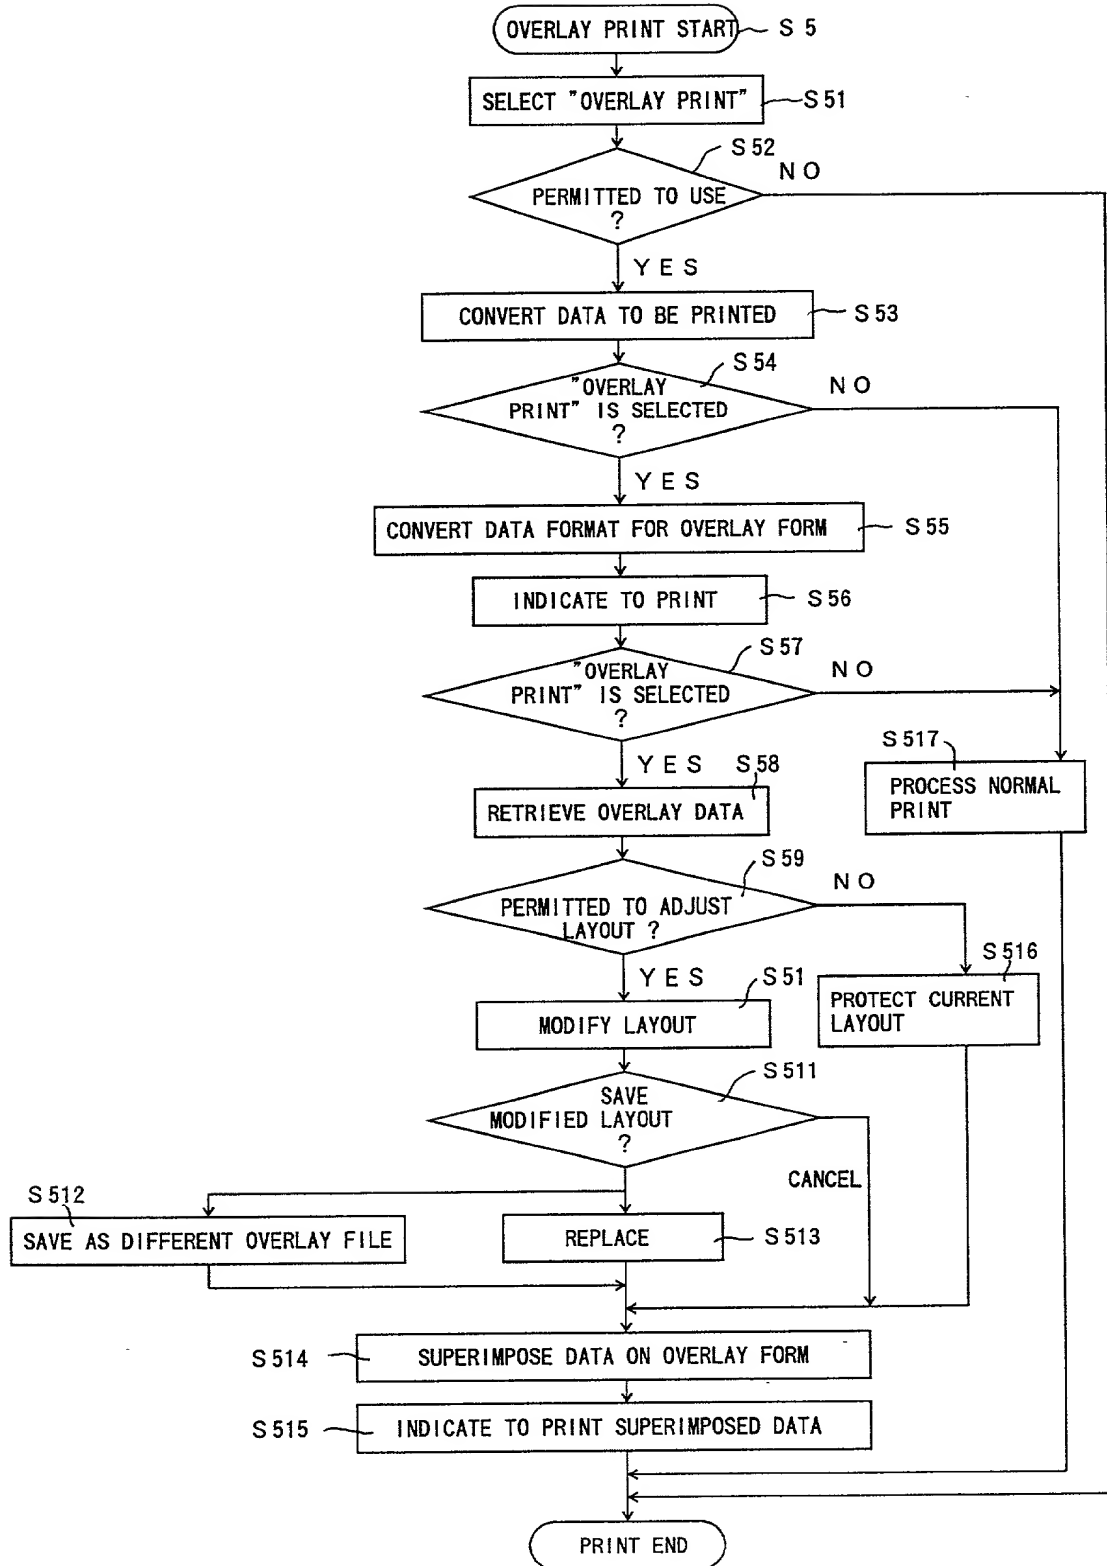

# FIG. 8

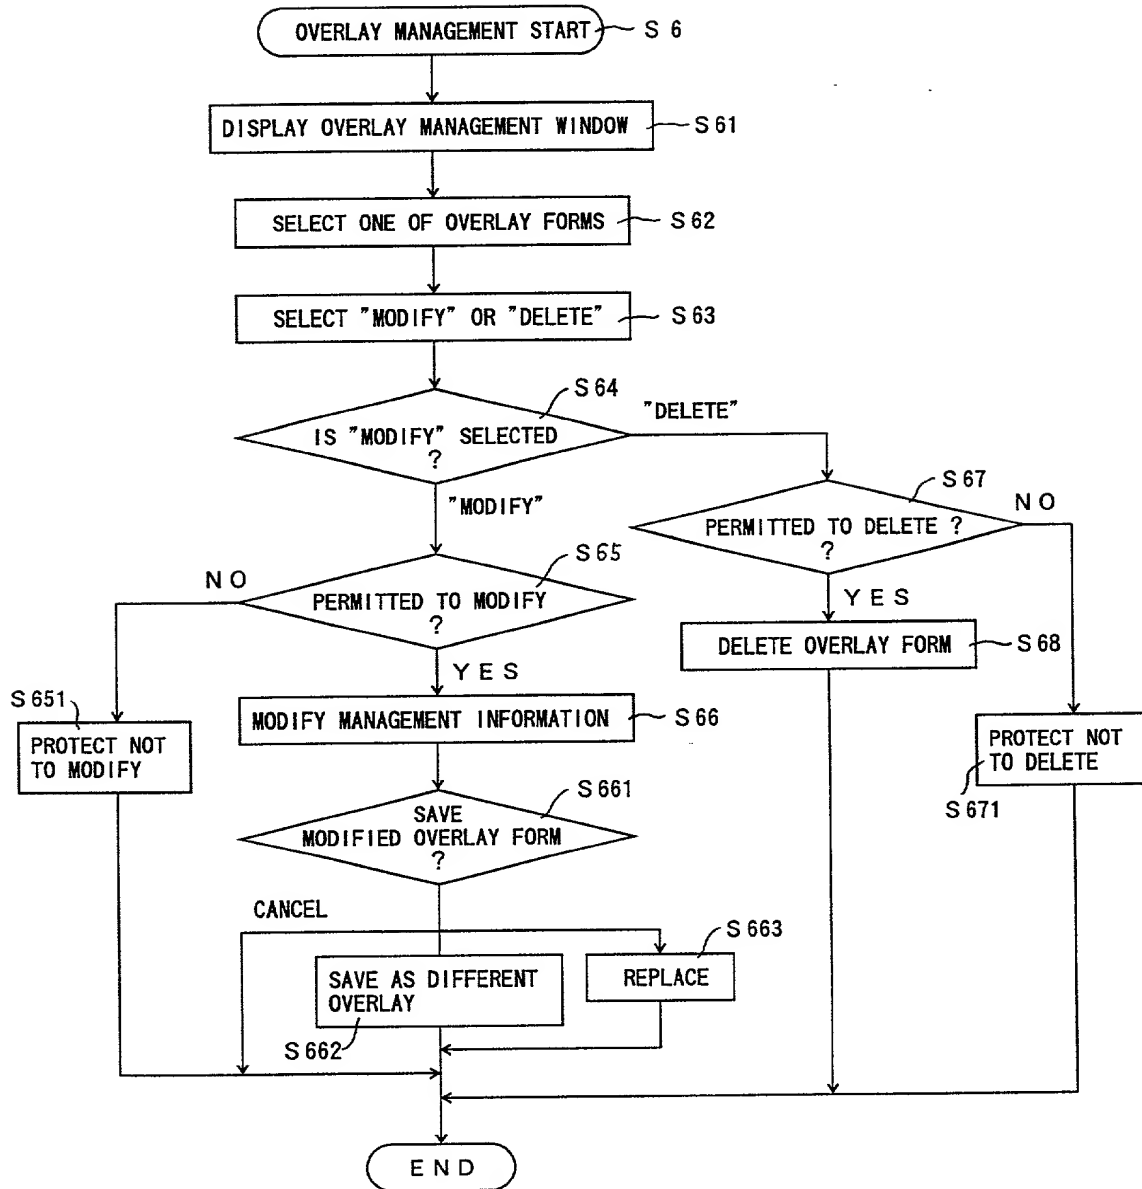

# FIG. 9

9c

ADDRESS				
NAME	ZIP CODE	ADDRESS	TEL.	FAX
Taro Tokyo	100-0001	CHIYODAKU, TOKYO	03-9999-9999	03-9999-9998
Yoshiko Choshi	141-0021	SHINAGAWAKU, TOKYO	03-8888-8888	03-8888-8887
Reiko Ohba	173-0015	NERIMAKU, TOKYO	03-7777-7777	03-7777-7776
Takao Ingi	160-0007	SHIBUYAKU, TOKYO	03-6666-6666	03-6666-6665
.....	.....	.....	.....	.....

↑

9a

ADDRESS				
NAME	ZIP CODE	ADDRESS	TEL.	FAX

9b

** **	100-0001	Tokyo***...	03-9999-9999	03-9999-9998
** **	141-0021	Tokyo***...	03-8888-8888	03-8888-8887
** **	173-0015	Tokyo***...	03-7777-7777	03-7777-7776
** **	160-0007	Tokyo***...	03-6666-6666	03-6666-6665
.....	.....	.....	.....	.....

## Declaration and Power of Attorney For Patent Application

### 特許出願宣言書及び委任状

### Japanese Language Declaration

### 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

DATA CONVERTING APPARATUS, METHOD FOR CONVERTING DATA AND COMPUTER-READABLE RECORDING MEDIUM RECORDED WITH A PROGRAM FOR CAUSING A COMPUTER TO CONVERT DATA

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を \_\_\_\_\_ とし、  
（該当する場合） \_\_\_\_\_ に訂正されました。

☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

### Prior Foreign Application(s) (Patent Application)

外国での先行出願  
No. 11-180229

Japan

25/June/1999

Priority Not Claimed

優先権主張なし

(Number)  
(番号)

(Country)  
(国名)

(Day/Month/Year Filed)  
(出願年月日)

☐

(Number)  
(番号)

(Country)  
(国名)

(Day/Month/Year Filed)  
(出願年月日)

☐

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)項に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知覚に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行なえば、出願した、又は共に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration

(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の  
手続を米特許審判局に対して遂行する弁理士または代理人  
として、下記の者を指名いたします。(弁理士、または代理  
人氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint  
the following attorney(s) and/or agent(s) to prosecute this  
application and transact all business in the Patent and Trademark  
Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358;  
William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul  
I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938;  
Michael C. Soldner, P-41,455 and William M. Schertler, 35,348 (agent)

書類送付先

Send Correspondence to:

STAAS & HALSEY  
700 Eleventh Street, N.W.  
Suite 500  
Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY  
(202) 434-1500

唯一または第一発明者名	Full name of sole or first inventor		
Hironori Morito			
発明者の署名	日付	Inventor's signature	Date
		Hironori Morito	March 24, 2000
住所	Residence		
	Kawasaki-shi, Kanagawa, Japan		
国籍	Citizenship		
	Japan		
私書箱	Post Office Address		
	c/o FUJITSU LIMITED,		
	1-1, Kamikodanaka 4-chome, Nakahara-ku,		
	Kawasaki-shi, Kanagawa, 211-8588 Japan		
第二共同発明者	Full name of second joint inventor, if any		
	Kohki Yahisa		
第二共同発明者	日付	Second inventor's signature	Date
		Kohki Yahisa	March 24, 2000
住所	Residence		
	Kawasaki-shi, Kanagawa, Japan		
国籍	Citizenship		
	Japan		
私書箱	Post Office Address		
	c/o FUJITSU LIMITED,		
	1-1, Kamikodanaka 4-chome, Nakahara-ku,		
	Kawasaki-shi, Kanagawa, 211-8588 Japan		

(第三以降の共同発明者についても同様に記載し、署名をす  
ること)

(Supply similar information and signature for third and subsequent  
joint inventors.)

第三共同発明者	Full name of third joint inventor, if any Junko Komine		
第三共同発明者	日付	Third inventor's signature <i>Junko Komine</i>	Date March 24, 2000
住 所	Residence Kawasaki-shi, Kanagawa, Japan		
国 籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan		
第四共同発明者	Full name of fourth joint inventor, if any Mika Terai		
第四共同発明者	日付	Fourth inventor's signature <i>Mika Terai</i>	Date March 24, 2000
住 所	Residence Kawasaki-shi, Kanagawa, Japan		
国 籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan		

第五共同発明者	Full name of fifth joint inventor, if any Hideki Kawamoto		
第五共同発明者	日付	Fifth inventor's signature <i>Hideki Kawamoto</i>	Date March 24, 2000
住 所	Residence Kanazawa-shi, Ishikawa, Japan		
国 籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU HOKURIKU SYSTEMS LIMITED, 4-30, Masuizumi 3-chome, Kanazawa-shi, Ishikawa, 921-8611 Japan		
第六共同発明者	Full name of sixth joint inventor, if any Akira Higashino		
第六共同発明者	日付	Sixth inventor's signature <i>Akira Higashino</i>	Date March 24, 2000
住 所	Residence Kanazawa-shi, Ishikawa, Japan		
国 籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU HOKURIKU SYSTEMS LIMITED, 4-30, Masuizumi 3-chome, Kanazawa-shi, Ishikawa, 921-8611 Japan		

(第七以降の共同発明者についても同様に  
記載し、署名をすること)

(Supply similar information and signature for  
seventh and subsequent joint inventors.)